



UNIQ SB-O 0.5S|TOP MOUNTED

EU 0.5 kN/m and UK 0.36 kN/m



Tested to 0.36 kN/m with:
12mm, 13.52mm, 15mm and 17.52mm Glass
*See back page for Test Report

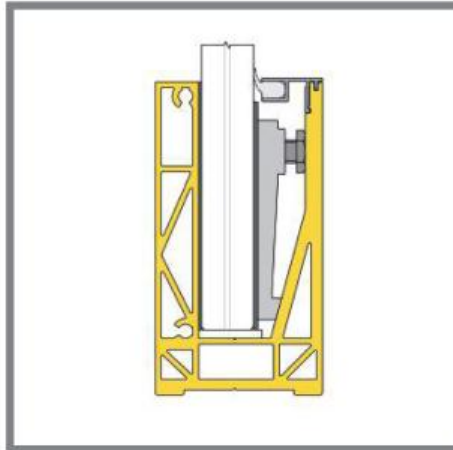

BASE PROFILE

- 2089015 SB-O 0,5S Brute
- 2089017 SB-O 0,5S Stainless look



L
4000mm
4000mm

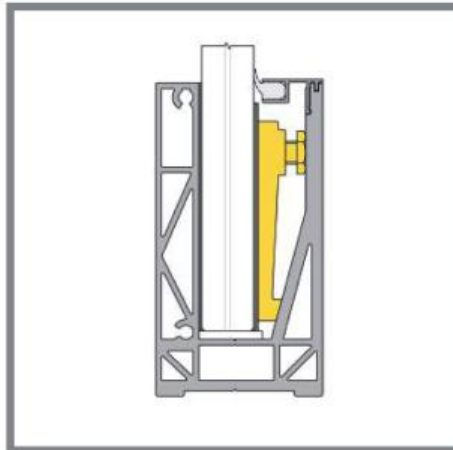

CLAMPING STRIP

- 2089116 CS-L1 - 10/10/pvb
- 2089119 CS-XL1 - 8/8/pvb

L
4000mm
4000mm

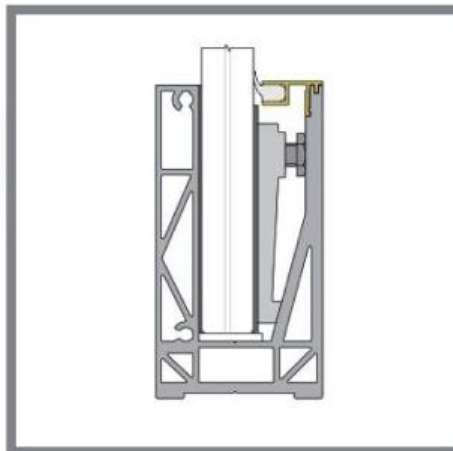

REAR COVER


- 2089104 CR-L1 - 10/10/pvb - Brute
- 2089358 CR-L1 - 10/10/pvb - Stainless look
- 2089106 CR-XL1 - 8/8/pvb - Brute
- 2089359 CR-XL1 - 8/8/pvb - Stainless look



B L
21 4000mm
21 4000mm
25 4000mm
25 4000mm

OPTIONAL FOR REAR COVER

- 1012301 Rubber for the cover front
- 1012309 Rubber for the cover front

L
4000mm
50000mm

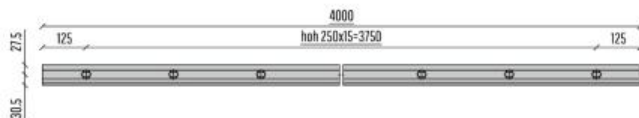

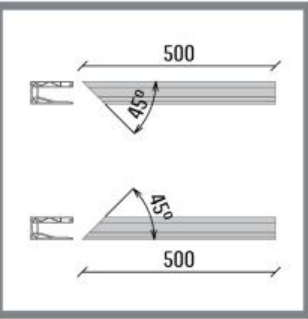

CORNER PIECES*

- 2089018 SB-O 0,5 Inside corner left
- 2089019 SB-O 0,5 Inside corner right
- 2089020 SB-O 0,5 Outside corner left
- 2089021 SB-O 0,5 Outside corner right

*Only available in stainless look

- L
- 500mm
- 500mm
- 500mm
- 500mm

